

SPEED 1.5 – RAPID ROLLING SHUTTER

Description

The shutter is composed by 93 mm profiles clamped together, made of profiled sheets in steel or aluminium, raw or painted finiture, with internal insulation in polyurethane foam with high density.

Vertical motion with upper roll-up.

Complete with lateral slat stoppers in nylon and bottom profile in extruded aluminium with bottom rubber/gasket.

The shutter is supplied completely assembled.

Upon request, visual panels in polycarbonate available.

In compliance with the standard UNI EN 13241-1 **CE**



Technical specifications

Material		Steel with polyurethane foam	Aluminium with polyurethane foam
Finish		Galvanized, powder coated	Pre.painted, powder coated
Sheet thickness	[mm]	0,692	0,692
Profile thickness	[mm]	20,00	20,00
Profile Height	[mm]	93,00	93,00
Weight	[kg/m ²]	13,50	6,00
Max. dimensions LxH (suggested)	[mm]	7500x4400	7500x5200
Wind resistance		Class 2	Class 2
Application		Applications where fast and repeated passage are needed	

Dimensions


The values are approximate. For specific details contact our Sales department.

H Height	B – Diameter of roll													
	6000	620	620	620	620	620	620	620	620	620	620	620	620	620
5500	580	580	580	580	580	580	580	580	580	580	580	580	580	580
5000	550	550	550	550	550	550	550	550	550	550	550	550	550	550
4500	530	550	550	550	550	550	550	550	550	550	550	550	550	550
4000	520	520	520	520	520	520	520	520	520	520	520	520	520	520
3500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	6750	7000	7500
	L – Clear opening Width													

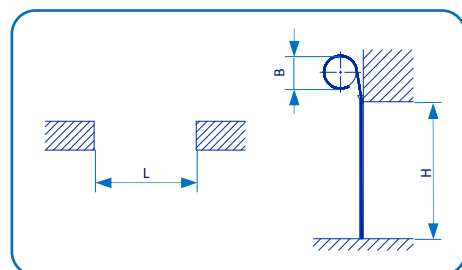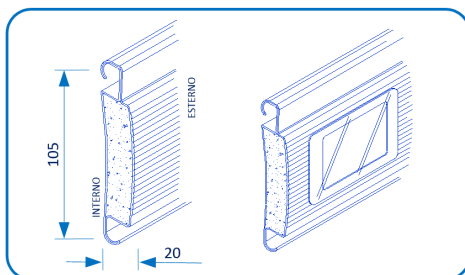

Lateral guides


Shaped guides in galvanized steel, thickness 2,0 mm with PVC gasket

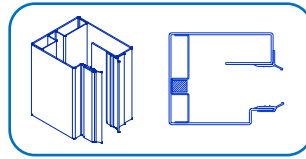

Accessories

Visual panels

1. Slats with visual panels in polycarbonate



Photocells

1. Safety sensor with safety light curtain installed in the sliding part of the guides or, alternatively, before or behind the door



Motorization

1. Lateral motor (also chain-driven) for shaft \varnothing 244




Finishing

Pre-painted colors	
Simil RAL	Description
9006	White Aluminium


Painted colors for Steel			
Simil RAL	Description	Simil RAL	Description
3003	Ruby Red	9002	Grey White
5010	Gentian Blue	9006	White Aluminium
6005	Moss Green	9007	Grey Aluminium
8014	Sepia Brown		

Painted colors for Aluminium					
Simil RAL	Description	Simil RAL	Description	Simil RAL	Description
1013	Oyster White	7015	Slate Grey	8014	Sepia Brown
1015	Light Ivory	7030	Stone Grey	9002	Grey White
3002	Carmine Red	7035	Light Grey	9005	Jet Black
5007	Brilliant Blue	7037	Dusty Grey	9006	White Aluminium
5010	Gentian Blue	7038	Agate Grey	9007	Grey Aluminium
6005	Moss Green	7039	Quartz Grey	9016	Traffic White
6009	Fir Green	7040	Window Grey		
6011	Reseda Green	7042	Traffic Grey		
7005	Mouse Grey	7044	Silk Grey		
7011	Iron Grey	8007	Fawn Brown		
7012	Basalt Grey	8011	Nut Brown		


The complete range of rolling shutter



Blank P.115




Micro-perforated P.115




Blank P.97




Micro-perforated P.97




Blank P.73




Micro-perforated P.73




Tubular P.120




Tubular P.95




Tubular P.60



Tubonda




Tondino




Insulated DP.77




Insulated DP.105



Insulated F.100



Insulated F.140



Windowed

Details and images in this leaflet are not binding.
Conegliano Group s.r.l. reserve the right to modify them without notice at any time.

Conegliano Group S.r.l

Via Campolongo 1/E Loc.Ramera Z.I. / 31010 Marenò di Piave – Treviso - Italy
Tel: +39 0438.4985 Fax: +39 0438.498540 / Web site: www.coneglianogroup.it
P.I. e C.F.: 00532460268- N.Reg.Imp.di TV 8758 / Share Capital i.v.: € 78.000,00