



RAL9006
in stock
delivery in 20 days!

**THE NEW
FAST**
INSULATED ROLLING SHUTTER

→ **SPEED**
1.5m/s

→ **INSULATION**
U = 3.7 W/m²K


→ **EXTREME
PRACTICALITY**
no stop!

WHY CHOOSE SPEED 1.5?

- > to save time
- > to save heating costs
- > to keep your warehouse safe


DON'T WAIT!

GET A QUOTE NOW

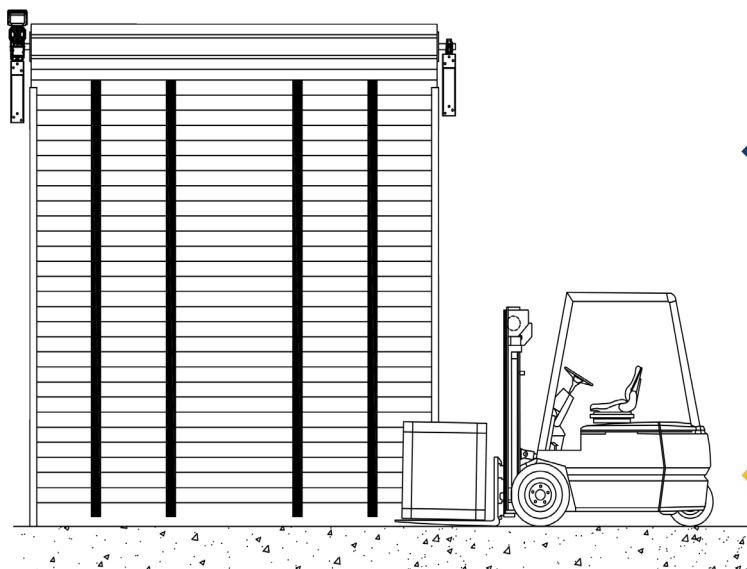

- > Mantle in Standard color RAL9006 (other colors upon request)
- > Molded lateral guides
- > Rotating shaft
- > Lateral motor
- > UCP pillow blocks

- > Manual override with chain
- > Control unit
- > Photocells
- > Bottom slat
- > Adapter rings



H. mm.	(B) mm.
3500	500
4000	520
4500	530
5000	550
5500	580
6000	620

WINDING DIMENSIONS SPEED 1,5

